

Concrete grinder EBS 180 H


The powerful hand-held grinder for medium sized surfaces

USE:

- Grinding and smoothing of surfaces
- Removing of screed seams, residual mud, plaster and coatings
- Preparing of surfaces, e.g. for tile renovation
- Concrete, screed, tile adhesive, natural stone, plaster, paint, coatings, carpet adhesive – with corresponding grinding wheels (accessories)

FEATURES:

- Powerful 2,500 W motor
- Electronic – soft start, temperature and over current cut-off
- Foldable front edge of dust guard – for grinding directly to the edge of the work area (no laborious reworking, saves time and costs)
- Brush rim – high suction power for dust-free working by connecting an industrial vacuum cleaner (accessory) to the 35 mm nozzle
- Parallel handle position – ergonomic handles allow exact and balanced guiding for a better surface finish
- Floor guiding device – available as accessory

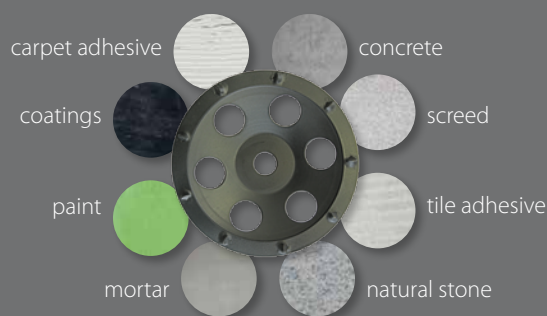

the machine for every surface: PCD-grinding wheel with monobloc diamonds – high removal rate and long lasting (accessory)



Floor guiding device (accessory) – comfortable use of the machine in an upright position

Ø 180

SPECIFICATIONS	EBS 180 H
Power input	2,500 W
Rated voltage	230 V ~
No-load speed	9,500 rpm
Disc diameter	180 mm
Spindle connection	Ø 22.2 mm
Weight	8.4 kg
Order no.	0633H000
Supplied	in a case with diamond-grinding wheel (concrete), tool kit

